


The pad to pad bifurcating connectors are cast of a high strength aluminum alloy and are capable of providing a corona free environment through 500KV. Mounting hardware and hardware shields are available, but must be ordered separately. To achieve a corona free environment, bolt shields must be used. Contact sealant is recommended. To obtain a connector with the single pad rotated 90 degrees use the prefix "BATV."

**Example:** BATV-12-EHV.

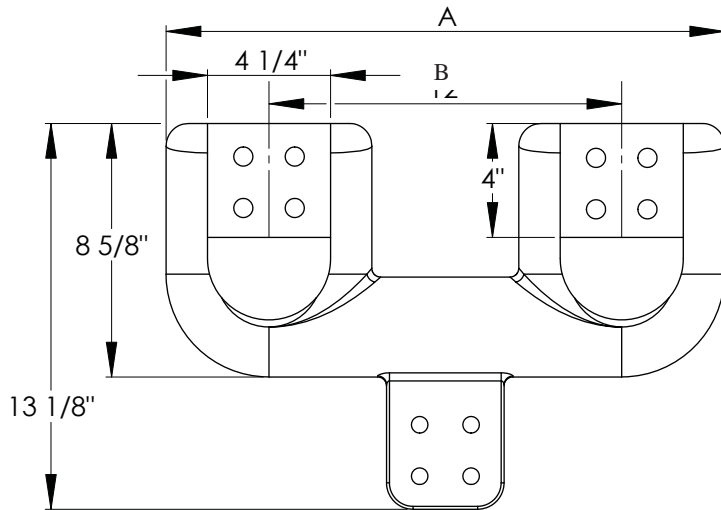

"Use prefix BATV"

BIFURCATING CONNECTORS SINGLE TO DOUBLE FLAT PADS		
CATALOG NUMBER	DIMENSIONS IN INCHES	
	A	B
BAT-12-EHV	18	12
BAT-18-EHV	24	18