




The cast electrical aluminum compression terminals for connecting aluminum cable bus to a perpendicular flat pad have the crimping die sizes clearly marked for ease of installation. These terminals offer corona free performance at both 345Kv and 500KV. Hardware shields are available but must be ordered separately.

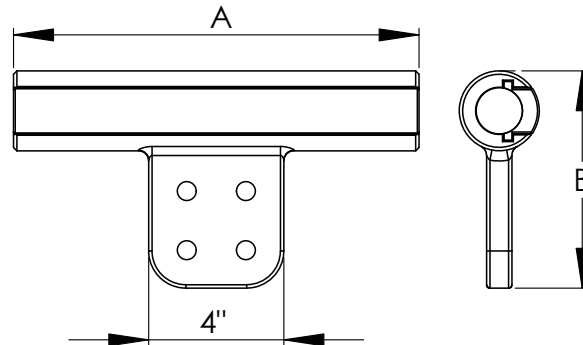

**EHV COMPRESSION TEE TERMINAL CABLE TO FLAT PAD**

CATALOG NUMBER	CABLE SIZE		CONDUCTOR DIMENSIONS			DIE REF.	PAD
	AAC	ACSR	DIA.	A	B		
16-152D-T-345KV	700-817.5	605-715.5	.964-1.081	12	6 1/8	1.843	1/2
16-161D-T-345KV	900-1000	795-874.5	1.082-1.152	12	6 1/8	1.843	1/2
16-164D-T-345KV	1333.5-1113	900-945	1.153-1.216	14	6 3/8	2.125	3/4
16-165D-T-345KV	1200-1272	1033.5-1113	1.217-1.300	14	6 3/8	2.375	3/4
16-167D-T-345KV	1400-1510.5	1272-1351.5	1.301-1.424	14	6 3/8	2.375	3/4
16-168D-T-345KV	1590-1700	1351.5-1590	1.425-1.506	14	6 3/8	2.375	3/4
16-169D-T-345KV	1750	1570.5-1590	1.507-1.545	14	6 3/8	2.375	3/4
16-170D-T-345KV	2000	1780	1.546-1.659	16	6 5/8	2.937	3/4
16-171D-T-EHV	-	2156	1.660-1.762	16	6 5/8	2.937	3/4
16-172D-T-EHV	2500	-	1.763-1.824	16	6 5/8	2.937	3/4
16-173D-T-EHV	3000	-	1.825-1.996	18	6 3/4	2.937	3/4
16-174D-T-EHV	3500	-	1.997-2.160	18	6 3/4	2.937	3/4

**16-4E**